


## Versatile, Bold & Bright

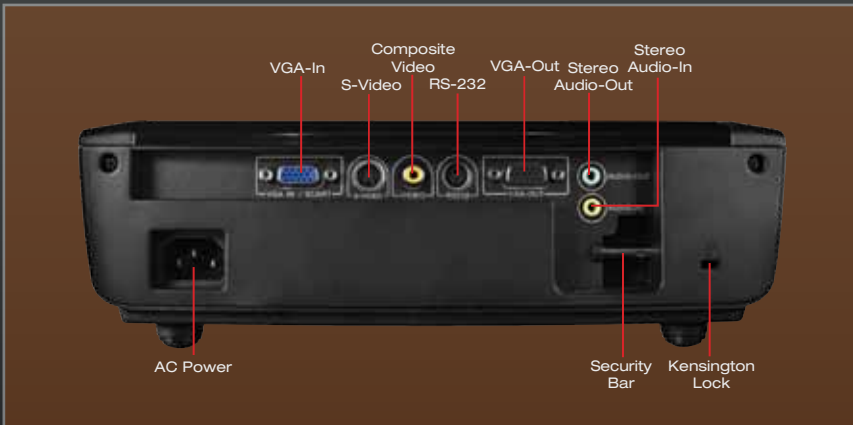

### DS323 FEATURES

- ❑ Native SVGA DLP® by Texas Instruments with BrilliantColor™ Technology
- ❑ Bright images and high contrast ratio - 2800 ANSI lumens and 3000:1 contrast ratio (full on/full off)
- ❑ Rapid on/off feature - Don't keep your audience waiting
- ❑ Protect your investment - Control panel lock and password protection allow you to customize security settings
- ❑ Filter-free design means low cost of ownership
- ❑ Wide range of connectivity options: VGA-in, VGA-out, S-video, composite video, audio-in, audio-out and RS-232

Small, sleek and stylish, the Optoma DS323 is perfect for business and classroom applications. Featuring brightness of 2800 ANSI lumens and a high contrast ratio of 3000:1, the DS323 will capture your audience's imagination. With lamp life of up to 4000 hours, filter-free design and low standby power consumption, the DS323 provides lower cost of ownership while delivering a perfect, colorful, crisp image.

# DS323 | Multimedia Projector

## Projection Distance/Image Size

Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)
6	42	38
8	56	51
10	71	64
12	85	77
14	99	90
16	113	102
18	127	115

## Control Panel



## Optional Accessories

Lamp:	BL-FU185A
Remote:	BR-3043N
VGA Cable (1.8m):	BC-VGVGXX02
Power Cord (1m):	BC-PUPIXY01
Power Cord (11m):	BC-PUPIXY11
Composite Cable (1.8m):	BC-COCOXX02
VGA to Component Adapter:	BC-VGCRXY00
Ceiling Mount:	BM-5001U
Wireless Dongle:	BI-EXTGB
Carrying Case:	BK-4006
84" 4:3 Manual Screen:	DS-3084PMG+

## Specifications

Display Technology:	Single 0.55" DMD DLP® Technology by Texas Instruments
Resolution:	Native SVGA (800 x 600)
Maximum Resolution:	UXGA (1600 x 1200)
Brightness (Typical):	2800 ANSI Lumens
Contrast Ratio:	3000:1 (Full On/Full Off)
Lamp Type:	185W UHP
Lamp Life (STD/Bright)*:	Estimated at 4000/3000 Hours
Throw Ratio:	1.95 to 2.15:1 (Distance/Width)
Image Size (Diagonal):	22.9" to 300" (0.58 to 7.62 m)
Projection Distance:	3.28' to 32.8' (1.0 to 10 m)
Noise Level (STD/Bright):	28dB/30dB
Remote Control:	IR Remote Control
Computer Compatibility:	UXGA, WXGA, SXGA+, SVGA, XGA, VGA Resized, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
Aspect Ratio:	4:3 Native, 16:9 & 16:10 Compatible
Projection Lens:	F=2.41~2.55, f=21.8~23.98 mm, 1.1x Manual Zoom and Focus
Offset:	115%
Monitor Loop Through:	D-Sub 15-Pin VGA Output (Functional in Both Normal and Standby Modes)
User Controls:	Complete On-Screen Menu in 23 Languages
Audio:	2-Watt Speaker
Keystone Correction:	± 40° Vertical
Vertical Refresh Rate:	24 to 85 Hz
Horizontal Scan Rate:	15.3 to 91.1 KHz
Power Supply:	AC Input 100-240V, 50-60Hz, Auto-Switching
Power Consumption:	255 Watts (Bright), 230 Watts (STD), <1 Watt (Standby)
Weight:	5 lbs (2.27 kg)
Dimensions (W x H x D):	11.28" x 3.98" x 7.6" (287 x 101 x 193 mm)
Operating Temperature:	41° to 95°F (5° to 40°C), 85% Max Humidity, Adjustable Fan Speed for High Altitude Application
Displayable Colors:	1.07 Billion
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	85%
Security:	Kensington® Lock, Keypad Lock, Security Bar
I/O Connectors:	VGA-In, VGA-Out, S-Video, Composite Video, Stereo Audio-In, Stereo Audio-Out and RS-232
Standard Accessories:	AC Power Cord, VGA to VGA Cable, Remote Control, Batteries for Remote, Carrying Case, Lens Cap, Quick Start Card, CD-ROM User's Manual and Warranty Card
Optional Accessories:	Ceiling Mount, S-Video Cable, Composite Video Cable, RS-232 Cable and Panoview Series Screens
Warranty:	One Year Parts and Labor, 90 Days on Lamp
UPC:	796435 41 688 1

[www.optoma.com](http://www.optoma.com)

\* Lamp life is dependent upon many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness may decrease over time.



All Specifications are subject to change without notice. ©2011 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments. All other names mentioned herein are property of their respective owners.