

Versatile, Bold & Bright



Small, sleek and stylish, the Optoma ES526L is perfect for business and classroom applications. Featuring 2800 ANSI lumens and a high contrast ratio of 3000:1, the ES526L will capture your audience's imagination. With lamp life of up to 4000 hours, filter-free design and low standby power consumption, the ES526L will provide lower cost of ownership while delivering a perfect, colorful, crisp image.

ES526L FEATURES


- ❑ Native SVGA DLP® by Texas Instruments with BrilliantColor™ Technology
- ❑ Bright images and high contrast ratio - 2800 ANSI lumens and 3000:1 contrast ratio (full on/full off)
- ❑ Rapid on/off feature - won't keep your audience waiting
- ❑ Filter-free design means low cost of ownership

ES526L | Multimedia Projector

Projection Distance/Image Size

Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)
6	42	38
8	56	51
10	71	64
12	85	77
14	99	90
16	113	102
18	127	115

Control Panel

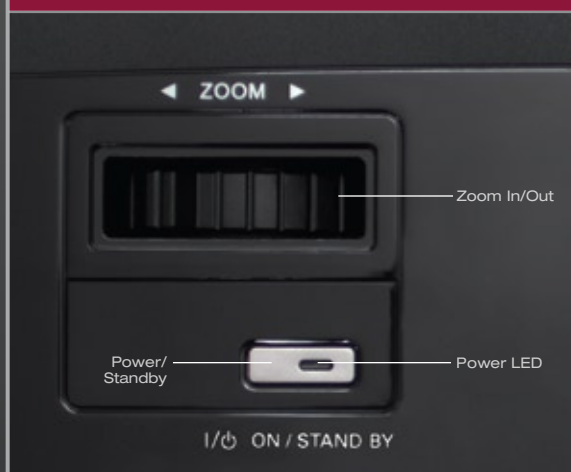

Optional Accessories

Lamp:	BL-FU185A
Remote:	BR-3043N
VGA Cable (1.8m):	BC-VGVGX02
Power Cord (1m):	BC-PUPIX01
Power Cord (11m):	BC-PUPIX11
Composite Cable (1.8m):	BC-COCOXX02
VGA to Component Adapter:	BC-VGCRXY00
Ceiling Mount:	BM-5001U
Wireless Dongle:	BI-EXTGB
Carrying Case:	BK-4006
84" 4:3 Manual Screen:	DS-3084PMG+

Specifications

Display Technology:	Single 0.55" DMD DLP® Technology by Texas Instruments
Resolution:	Native SVGA (800 x 600)
Maximum Resolution:	UXGA (1600 x 1200)
Brightness (Typical):	2800 ANSI Lumens
Contrast Ratio:	3000:1 (Full On/Full Off)
Lamp Type:	185W UHP
Lamp Life (STD/Bright):	Estimated at 4000/3000 Hours
Throw Ratio:	1.95 to 2.15:1 (Distance/Width)
Image Size (Diagonal):	22.9" to 300" (0.58 to 7.62 m)
Projection Distance:	3.28' to 32.8' (1.0 to 10 m)
Noise Level (STD/Bright):	27dB/29dB
Remote Control:	IR Remote Control
Computer Compatibility:	UXGA, WXGA, SXGA+, SVGA, XGA, SVGA, VGA Resized, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
Aspect Ratio:	4:3 Native, 16:9 & 16:10 Compatible
Projection Lens:	F=2.41~2.55, f=21.8~23.98 mm, 1.1x Manual Zoom and Focus
Offset:	115%
User Controls:	Complete On-Screen Menu in 23 Languages
Keystone Correction:	± 40° Vertical
Vertical Refresh Rate:	24 to 85 Hz
Horizontal Scan Rate:	15.3 to 91.1 KHz
Power Supply:	AC Input 100-240V, 50-60Hz, Auto-Switching
Power Consumption:	255 Watts (Bright), 230 Watts (STD), <1 Watt (Standby)
Weight:	5 lbs (2.27 kg)
Dimensions (W x H x D):	11.28" x 3.98" x 7.6" (287 x 101 x 193 mm)
Operating Temperature:	41° to 95°F (5° to 40°C), 85% Max Humidity, Adjustable Fan Speed for High Altitude Application
Displayable Colors:	1.07 Billion
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	85%
Security:	Kensington® Lock, Keypad Lock, Security Bar
I/O Connectors:	VGA-In, Composite Video, S-Video and RS-232
Standard Accessories:	AC Power Cord, VGA to VGA Cable, Remote Control, Batteries for Remote, Carrying Case, Lens Cap, Quick Start Card, CD-ROM User's Manual and Warranty Card
Optional Accessories:	Ceiling Mount, Wireless Dongle, Composite Video Cable, RS-232 Cable and Panoview Series Screens
Warranty:	One Year Parts and Labor, 90 Days on Lamp
UPC:	796435 41 183 1

www.optoma.com

*Lamp life is dependent upon many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.



All Specifications are subject to change without notice. ©2010 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments. All other names mentioned herein are property of their respective owners.