
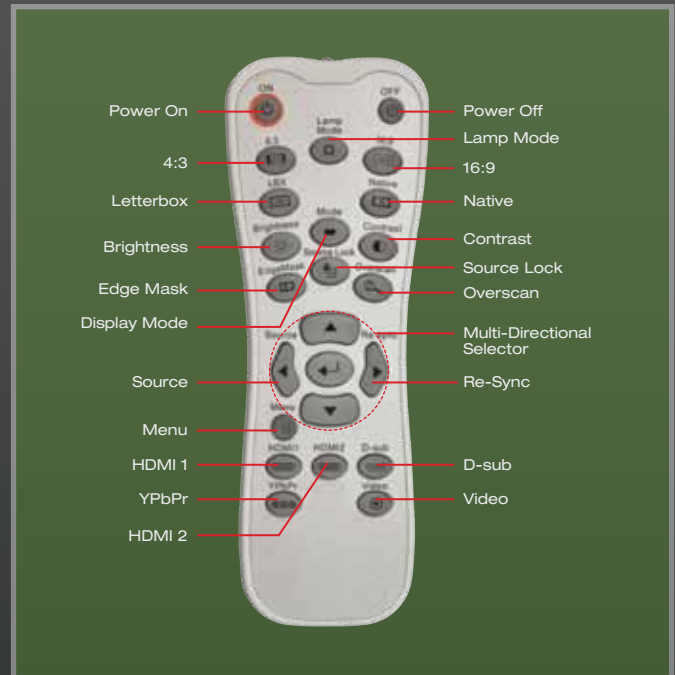


Dynamic Performer

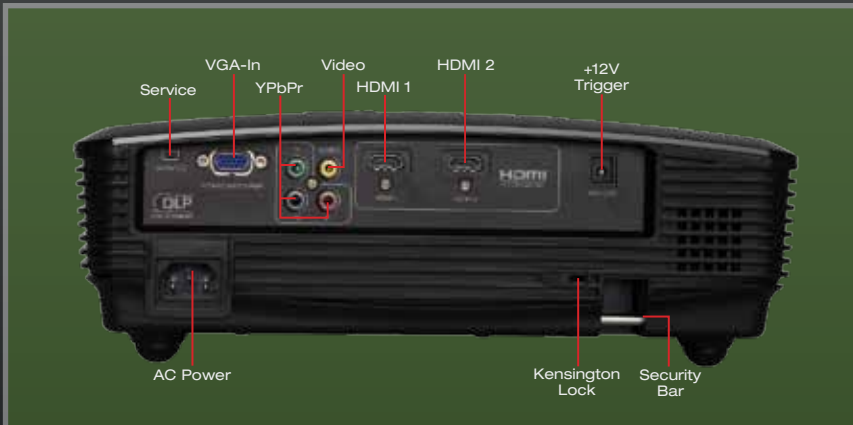

HD2200 FEATURES

- ❑ Bright at 1900 ANSI lumens and high contrast ratio of 5000:1
- ❑ Native 1080p DLP® chipset and BrilliantColor™ technology by Texas Instruments
- ❑ Zero dead pixel guarantee for additional peace of mind
- ❑ ISF Certified Calibration Controls with Day & Night modes
- ❑ Perfect for connecting to any home entertainment device with HDMI, component, composite and VGA
- ❑ Project up to 300" screen size for large group viewing


The Optoma HD2200 performs flawlessly and delivers a dynamic big-screen experience! With 1900 ANSI lumens and 5000:1 contrast, the HD2200's true 1080p resolution brings excellent color saturation and subtle details to dazzling life. Weighing only 6.4 lbs., this sleek performer is perfect for sharing entertainment - big-screen movies, sporting events, concerts and video gaming.

HD2200 Home Theater

Projection Distance/Image Size

| Projection Distance (Feet) | Maximum Diagonal (Inches) | Minimum Diagonal (Inches) |
|----------------------------|---------------------------|---------------------------|
| 6 | 55 | 46 |
| 8 | 73 | 61 |
| 10 | 92 | 76 |
| 12 | 110 | 92 |
| 14 | 129 | 107 |
| 16 | 147 | 122 |
| 18 | 165 | 138 |

Control Panel

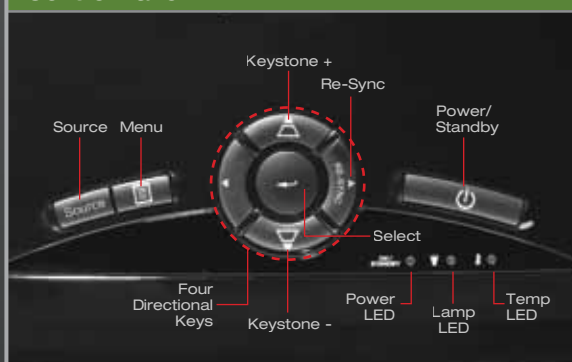

Optional Accessories

| | |
|-------------------------------|-------------|
| Lamp: | BL-FP230D |
| Mount: | BM-5001U |
| Remote: | BR-3042B |
| HDMI Cable (7.5m): | BC-DDHMXX08 |
| HDMI Cable (5m): | BC-HMHMXX05 |
| VGA to Component Cable (5m): | BC-VGCRXX05 |
| Component Cable (2m): | BC-CRCRXX02 |
| Composite Cable (2m): | BC-COCOXX02 |
| Carrying Case: | BK-4028 |
| 106" 16:9 Fixed Frame Screen: | DF-WW9106F |
| Power Cord (11m): | BC-PUPIX11 |

Specifications

| | |
|-----------------------------------|---|
| Display Technology: | Single 0.65" 1080p DMD DLP® Technology by Texas Instruments |
| Resolution: | Native 1080p (1920 x 1080) |
| Brightness (Typical): | 1900 ANSI Lumens |
| Contrast Ratio: | 5000:1 Contrast (Full On/Full Off) |
| Lamp Life and Type (STD/Bright)*: | Estimated at 4000/3000 Hours/230W P-VIP |
| Throw Ratio: | 1.5-1.8:1 |
| Image Size (Diagonal): | 37.6" to 301.1" (0.95 to 7.64 m) |
| Projection Distance: | 4.92' to 32.8' (1.5 to 10 m) |
| Noise Level (STD/Bright): | 29dB/31dB |
| Remote Control: | Fully Featured Backlit IR Remote |
| Computer Compatibility: | HD, UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized, VESA, PC and Macintosh Compatible |
| Video Compatibility: | NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p) |
| Aspect Ratio: | 16:9 Native, 4:3 and LBX Compatible |
| Projection Lens: | F=2.55-2.87, f=22.4-26.8mm, 1.2x Manual Zoom and Focus |
| Offset: | 116% |
| User Controls: | Complete On-Screen Menu Adjustments in 21 Languages |
| Keystone Correction: | ± 5° Vertical |
| Power Supply: | AC Input 100 - 240V, 50-60 Hz, Auto-Switching |
| Power Consumption: | 308 Watts (Bright), 254 Watts (STD), <1 Watt (Standby) |
| Weight: | 6.4 lbs (2.9 kg) |
| Dimensions (W x H x D): | 12.76" x 3.82" x 9.21" (324 x 97 x 234 mm) |
| Operating Temperature: | 41 - 95°F (5 - 35°C), 80% Max Humidity |
| Displayable Colors: | 1.07 Billion |
| Projection Method: | Front, Rear, Ceiling Mount, Table Top |
| Uniformity: | 70% |
| Security: | Kensington® Lock Security Bar, Keypad Lock |
| I/O Connectors: | Two HDMI, VGA-In, Component Video, Composite Video and +12V Trigger |
| Standard Accessories: | AC Power Cord, Composite Video Cable, Remote Control, Batteries for Remote, Lens Cap, User's Manual, Quick Start Card and Warranty Card |
| Optional Accessories | Ceiling Mount, Component Cable, HDMI Cable, Composite Video Cable and Panoview™ Series Screens |
| Warranty: | Three Years Optoma Replacement Service, Two Years on Lamp |
| UPC: | 796435 81 112 9 |

www.optoma.com

* Lamp life is dependent upon many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.



All Specifications are subject to change without notice. ©2011 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments. All other names mentioned herein are property of their respective owners.