
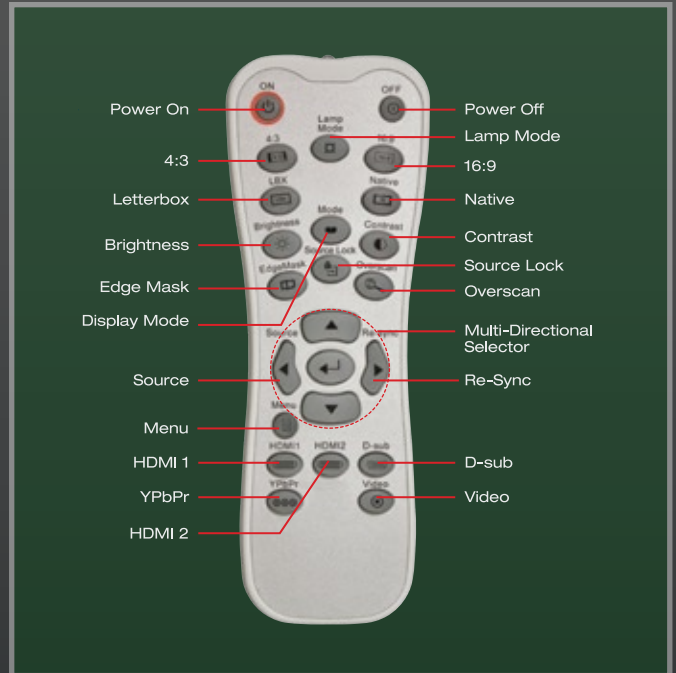


Dynamic Performer

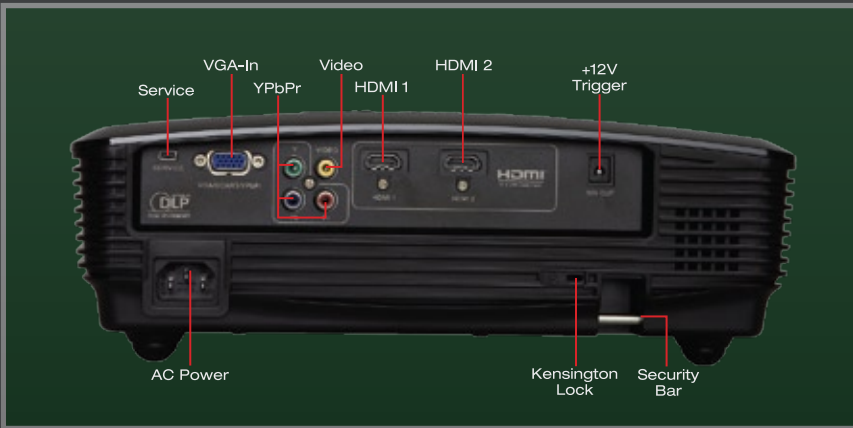

The Optoma HD22 performs flawlessly and delivers a dynamic big-screen experience! With 1900 ANSI lumens and 5000:1 contrast, the HD22's true 1080p resolution brings excellent color saturation and subtle details to dazzling life. Weighing only 6.4 lbs., this sleek performer is perfect for sharing entertainment - big-screen movies, sporting events, concerts and video gaming.

HD22 FEATURES


- ❑ Bright at 1900 ANSI lumens and high contrast ratio of 5000:1
- ❑ Native 1080p DLP® chipset and BrilliantColor™ technology by Texas Instruments
- ❑ Zero dead pixel guarantee for additional peace of mind
- ❑ ISF Certified Calibration Controls with Day & Night modes
- ❑ Perfect for connecting to any home entertainment device with HDMI, component, composite and VGA
- ❑ Project up to 300" screen size for large group viewing

HD22 Home Theater

Projection Distance/Image Size

Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)
6	55	46
8	73	61
10	92	76
12	110	92
14	129	107
16	147	122
18	165	138

Secondary Convenience Remote

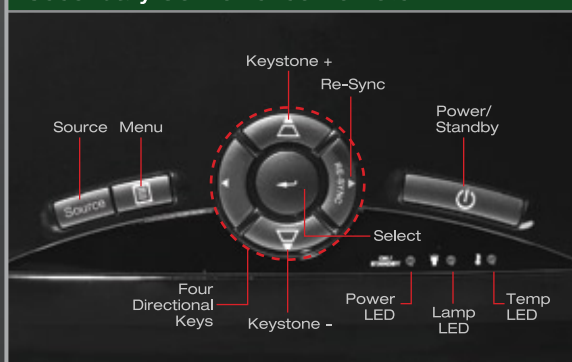

Optional Accessories

Lamp:	BL-FP230D
Mount:	BM-5001U
Remote:	BR-3042B
HDMI Cable (7.5m):	BC-DDHMXX08
HDMI Cable (5m):	BC-HMHMXX05
VGA to Component Cable (5m):	BC-VGCRXX05
Component Cable (2m):	BC-CRCRXX02
Composite Cable (2m):	BC-COCOXX02
Carrying Case:	BK-4028
106" 16:9 Fixed Frame Screen:	DF-WW9106F
Power Cord (11m):	BC-PUPIX11

Specifications

Display Technology:	Single 0.65" 1080p DMD DLP® Technology by Texas Instruments
Resolution:	Native 1080p (1920 x 1080)
Brightness (Typical):	1900 ANSI Lumens
Contrast Ratio:	5000:1 Contrast (Full On/Full Off)
Lamp Life and Type (STD/Bright):	Estimated at 4000/3000 Hours/230W P-VIP
Throw Ratio:	1.5-1.8:1
Image Size (Diagonal):	37.6" to 301.1" (0.95 to 7.64 m)
Projection Distance:	4.92' to 32.8' (1.5 to 10 m)
Noise Level (STD/Bright):	29dB/31dB
Remote Control:	Fully Featured Backlit IR Remote
Computer Compatibility:	HD, UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
Aspect Ratio:	16:9 Native, 4:3 and LBX Compatible
Projection Lens:	F=2.55-2.87, f=22.4-26.8mm, 1.2x Manual Zoom and Focus
Offset:	116%
User Controls:	Complete On-Screen Menu Adjustments in 21 Languages
Keystone Correction:	± 5° Vertical
Power Supply:	AC Input 100 - 240V, 50-60 Hz, Auto-Switching
Power Consumption:	308 Watts (Bright), 254 Watts (STD), <1 Watt (Standby)
Weight:	6.4 lbs (2.9 kg)
Dimensions (W x H x D):	12.76" x 3.82" x 9.21" (324 x 97 x 234 mm)
Operating Temperature:	41 - 95°F (5 - 35°C), 80% Max Humidity
Displayable Colors:	1.07 Billion
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	70%
Security:	Kensington® Lock Security Bar, Keypad Lock
I/O Connectors:	Two HDMI, VGA-In, Component Video, Composite Video and +12V Trigger
Standard Accessories:	AC Power Cord, Composite Video Cable, Remote Control, Batteries for Remote, Lens Cap, User's Manual, Quick Start Card and Warranty Card
Optional Accessories	Ceiling Mount, Component Cable, HDMI Cable, Composite Video Cable and Panoview™ Series Screens
Warranty:	Up to 3 Years Optoma Express Replacement Service, Up to 1 Year on Lamp
UPC:	796435 81 113 6

www.Optoma.ca

