


Flexibility for Home Theater

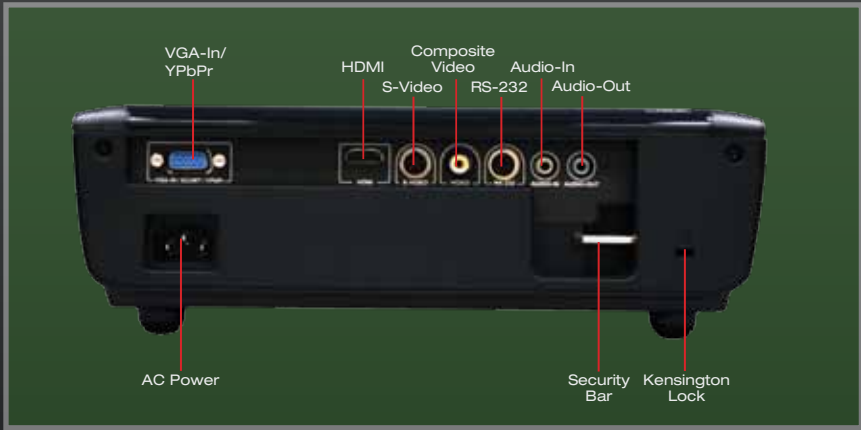

HD6700 FEATURES

- ❑ Bright at 1800 ANSI lumens and contrast ratio of 4000:1
- ❑ Up to 300" screen size for large group viewing
- ❑ Compatible with a broad range of video, computer and gaming sources
- ❑ Features Texas Instruments 720p DC3 DLP® chipset and BrilliantColor™ technology
- ❑ Backlit remote control

The Optoma HD6700 is a native 720p high performance home theater projector. High contrast ratio delivers truer and more vibrant color to enhance your home entertainment to the fullest. Enter the 3rd dimension with 3D* capability and take the entertainment to a whole new level with up to 300" of image size.

3D content can be viewed with active LCD shutter glasses when the projector is connected to a computer with a compatible 3D graphics card. Please visit www.optoma.com for more information.

HD6700 | Home Theater

Projection Distance/Image Size

Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)
6	53	49
8	71	65
10	89	81
12	107	97
14	124	113
16	142	130
18	160	146

Control Panel



Optional Accessories

Lamp:	BL-FU185A
Remote Control:	BR-3053B
Carrying Case:	BK-4006
Power Cord (1m):	BC-PUPIXY01
Power Cord (11m):	BC-PUPIXY11
HDMI Cable (7.5m):	BC-HMHMXX08
Composite Cable (1.8m):	BC-COCOXX02
VGA Cable (1.8m):	BC-VGVGXX02
VGA Cable (5m):	BC-VGVGXX05
VGA to Component Adapter:	BC-VGCRXY00
Ceiling Mount:	BM-5001U
92" Matte White 16:9 Manual Pull-Down Screen:	DS-9092PMG+

Specifications

Display Technology:	Single 0.62" 720p DMD DLP® Technology by Texas Instruments
Resolution:	Native 720p (1280 x 720)
Brightness (Typical):	1800 ANSI Lumens
Contrast Ratio:	4000:1 Contrast (Full On/Full Off)
Lamp Life and Type (STD/Bright)*:	Estimated at 4000/3000 Hours/180W UHP
Throw Ratio:	1.55-1.7:1 (Distance/Width)
Image Size (Diagonal):	27.2 to 301" (0.69 to 7.65 m)
Projection Distance:	3.28' to 32.8' (1.0 to 10 m)
Noise Level (STD/Bright):	29dB/31dB
Remote Control:	Backlit Remote
Computer Compatibility:	UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
3D Compatibility:	120Hz Frame Sequential 3D for Resolutions Up to 720p, 60Hz Field Sequential 3D for Resolutions Up to 480i
Projection Lens:	F=2.5-2.67, f=21.8-24mm, 1.1x Manual Zoom and Focus
Offset:	112%
User Controls:	Complete On-Screen Menu Adjustments in 23 Languages
Keystone Correction:	± 16° Vertical
Power Supply:	AC Input 100 - 240V, 50-60 Hz, Auto-Switching
Power Consumption:	255 Watts (Bright), 207 Watts (STD), <1 Watt (Standby)
Weight:	5 lbs (2.27 kg)
Dimensions (W x H x D):	11.26" x 3.82" x 7.56" (286 x 97 x 192 mm)
Operating Temperature:	41 - 104°F (5 - 40°C), 85% Max Humidity
Displayable Colors:	1.07 Billion
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	85%
Security:	Kensington® Lock Port, Security Bar
I/O Connectors:	HDMI, VGA-In, S-Video, Composite Video, Stereo Audio-In and RS-232
Standard Accessories:	AC Power Cord, Composite Video Cable, Remote Control, Batteries for Remote, Lens Cap, Multilingual CD-ROM User's Manual, Quick Start Card and Warranty Card
Optional Accessories	HDMI Cable, Ceiling Mount, Component Cable, S-Video Cable, Composite Video Cable, RS-232 Cable and Panoview™ Series Screens
Warranty:	3 Years Optoma Exchange, 1 Year on Lamp
UPC:	796435 81 125 9

www.optoma.com

*Lamp life is dependent upon many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

