


Versatility & Brilliant Unleashed

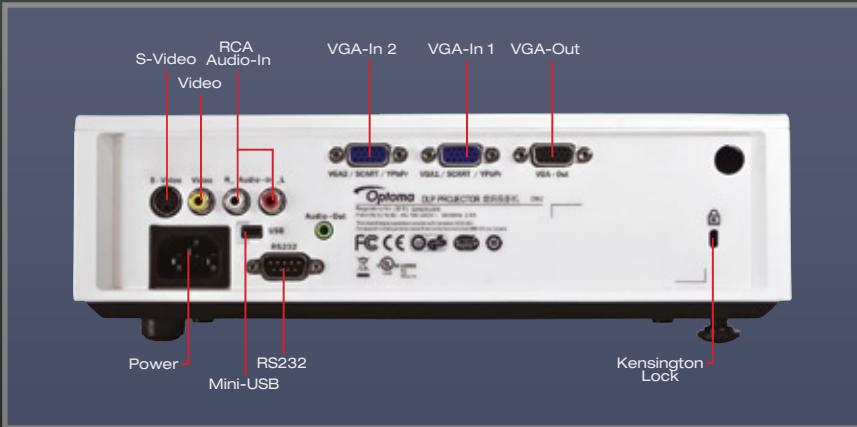

TX532 FEATURES

- ❑ Native XGA DLP® by Texas Instruments with BrilliantColor Technology
- ❑ Bright images with easy-to-read text - 2800 ANSI lumens and 3000:1 contrast ratio (full on/full off)
- ❑ Ideal presentation remote with laser pointer and page-advance features
- ❑ Rapid power-on and shutdown - saving you time and money
- ❑ Built-in closed captioning and logo capture
- ❑ Filter-free design means low cost of ownership
- ❑ Wide range of connectivity options: two VGA-in, VGA-out, s-video, composite video, RCA audio-in, audio-out, RS-232 and USB


Bringing you bright images with extensive plug and play connectivity, the Optoma TX532 delivers powerful features without gimmicks. Captivate your audience with the TX532's high brightness and contrast levels perfectly calibrated to produce easy-to-read text in classrooms and conference rooms. With lamp life up to 4000 hours, the TX532 features a filter-free design that requires less maintenance and ensures lower cost of ownership over time.

TX532 | Multimedia Projector

Projection Distance/Image Size

Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)
6	47	42
8	62	56
10	78	69
12	93	83
14	109	97
16	124	111
18	140	125

Control Panel

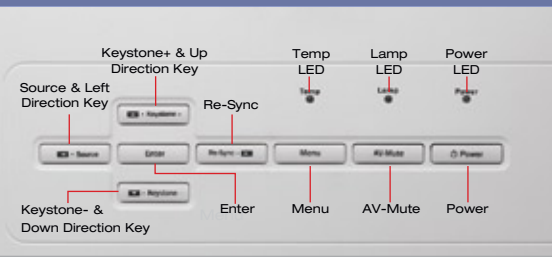

Optional Accessories

Lamp:	BL-FP180D
Remote:	BR-5027L
VGA Cable (1.8m):	BC-VGVGX02
Power Cord (1m):	BC-PUPIX01
Power Cord (11m):	BC-PUPIX11
S-Video Cable (1.8m):	BC-SVSVX02
Composite Cable (1.8m):	BC-COCOX02
VGA to Component Cable (1.8m):	BC-VGCRXX02
VGA to Component Adapter:	BC-VGCRXY00
Carrying Case:	BK-4023
100" 4:3 Manual Pull-Down Screen:	DS-3100PM

Specifications

Display Technology:	Single 0.55" DMD DLP® Technology by Texas Instruments
Resolution:	Native XGA (1024 x 768)
Maximum Resolution:	WUXGA (1920 x 1200)
Brightness (Typical):	2800 ANSI Lumens
Contrast Ratio:	3000:1 (Full On/Full Off)
Lamp Type:	180W P-VIP
Lamp Life (STD/Bright):	Estimated at 4000/3000 Hours
Throw Ratio:	1.93 to 2.16:1 (Distance/Width)
Image Size (Diagonal):	23" to 300" (0.58 to 7.62m)
Projection Distance:	3.28' to 38.71' (1.0 to 11.8 m)
Noise Level (STD/Bright):	30dB/32dB
Remote Control:	Fully Featured IR Remote with Laser Pointer and Mouse
Computer Compatibility:	WUXGA, HD, WXGA+, UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
Aspect Ratio:	4:3 Native, 16:9 and 16:10 Compatible
Projection Lens:	F = 2.52-2.73, f = 21.8-24mm, 1.1x Manual Zoom and Focus
Offset:	114%
User Controls:	Complete On-Screen Menu Adjustments in 22 Languages
Audio:	One 2-Watt Speaker, Variable Audio-Out
Keystone Correction:	± 30° Vertical
Vertical Refresh Rate:	43 to 87 Hz
Horizontal Scan Rate:	15 kHz, 30 to 91.4 kHz
Power Supply:	AC Input 100 - 240V, 50-60 Hz, Auto-Switching
Power Consumption:	230 Watts (Bright), 210 Watts (STD), < 1 Watts (Standby)
Weight:	5.5 lbs (2.5 kg)
Dimensions (W x H x D):	11.0" x 3.2" x 8.1" (280 x 80 x 205 mm)
Operating Temperature:	41-104° F (5-40° C) (85% Humidity), Adjustable Fan Speed for High Altitude Application
Displayable Colors:	1.07 Billion
Projection Method:	Front, Rear, Table Top and Ceiling Mount
Uniformity:	80%
Security:	One Kensington® Lock Port
I/O Connectors:	Two VGA-In, VGA-Out, S-Video, Composite Video, RCA Audio-In, Audio-Out, RS-232 and Mini-USB
Standard Accessories:	AC Power Cord, VGA to VGA Cable, Remote Control, Batteries for Remote, Lens Cap, CD-ROM User's Manual, Quick Start Guide and Warranty Card
Optional Accessories:	Ceiling Mount, VGA to Component Cable, S-Video Cable, Composite Video Cable and Panoview™ Series Screens
Warranty:	Up to 3 Years Limited Parts and Labor, Up to 1 Year on Lamp
UPC:	796435 41 106 0

www.OptomaUSA.com

