

MULTIMEDIA PROJECTOR DX326



POWERFUL PORTABLE PERFORMANCE



Exceptional image quality with outstanding color reproduction



Full 3D for the most amazing, most immersive viewing experience



Remarkably powerful and bright



Advanced energy saving features to reduce the cost of operation



Easy to operate



Full 3D



The Optoma DX326 is a bright, feature rich DLP® projector, designed to deliver fantastic presentations whether on the road or at the office.

With its 2600 lumens and 13,000:1 contrast ratio the Optoma DX326 will win over your audience with its remarkably sharp, bright image and rich saturated colors.

The Optoma DX326 is compact and light, yet offers just the level of connectivity you need. And its intuitive menu makes it incredibly easy to operate, allowing you to fully concentrate on delivering your very best presentation.

The Optoma DX326 is reliable and economical. Features the latest Optoma Eco+ technology for ultra long lamp life and its DLP technology along with Optoma's commitment to quality, to ensure your projector will provide years of care-free operation.

CONNECTIVITY (May require optional accessories)




COMPUTERS



SMART PHONES



TABLETS



3D BLU-RAY/DVD PLAYERS



SET TOP BOXES



CAMCORDERS



GAME CONSOLES



DIGITAL CAMERAS



Roku®



Apple TV®

MULTIMEDIA PROJECTOR — DX326

OPTICAL/TECHNICAL SPECIFICATIONS

Display Technology	Single 0.55" DC3 DMD DLP® Technology by Texas Instruments™
Native Resolution	XGA (1024 x 768)
Maximum Resolution	VGA: UXGA (1600 x 1200) HDMI (1920 x 1200)
Brightness	2600 lumens
Contrast Ratio	13,000:1 (full on/full off)
Displayable Colors	1.07 Billion
Lamp Life and Type*	6500/6000/4500 Hours (ECO+/ECO/normal) 190W
Projection Method	Front, rear, ceiling mount, table top
Keystone Correction	±40° Vertical
Uniformity	>85%
Offset	114%
Aspect Ratio	4:3 Native, 16:9 compatible
Throw Ratio (distance/Width)	1.9–2.17
Projection Distance	3.2'–32.8' (1–10 m)
Image Size (Diagonal)	22.9"–300" (0.58–7.62 m)
Projection Lens	F=2.41–2.55, f=21.8–24 mm 1.1x manual zoom and focus
Digital Zoom	0.8 ~ 2.0
Audio	One 2-Watt speaker
Noise Level	28dB
Remote Control	IR remote
Operating Temperature	41–113°F (5–45°C), 85% max humidity
Power Supply	AC Input 100–240V, 50–60Hz, auto-switching
Power Consumption	Max 255W (Normal), Min 207W (Eco+), <0.5W (standby-ECO)

COMPATIBILITY SPECIFICATIONS


Computer Compatibility	UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA resized, VESA, PC and Macintosh compatible
Video Input Compatibility	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
3D Compatibility†	Frame sequential, side by side and top/bottom format (See user manual for more information). 3D glasses are needed and sold separately.
Vertical Scan Rate	24–85Hz, 120Hz, 144Hz
Horizontal Scan Rate	15.375–91.146KHz
User Controls	Complete on-screen menu, adjustments in 27 languages
IO Connection Ports	VGA-in, HDMI, S-video, composite video, RS- 232C, Audio-in, Audio-out, VGA-out
Loop Through (Audio, VGA)	Monitor: D-Sub 15 pin VGA output (functional in both normal and standby modes), Audio: VAO audio out, HDMI VAO audio out supported, (VAO in normal mode, fixed during Standby)

PHYSICAL SPECIFICATIONS

Security	Kensington® Lock Port, security bar and keypad lock
Weight	5 lb (2.27 kg)
Dimensions (W x H x D)	11.28" x 3.98" x 7.6"

*Lamp life is dependent on many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

†3D content can be viewed with either RF or DLP Link active shutter glasses when projector is used with a compatible 3D player. RF 3D glasses require the use of an RF 3D emitter and a projector with a 3D VESA Sync port. Please visit www.OptomaUSA.com for more information.

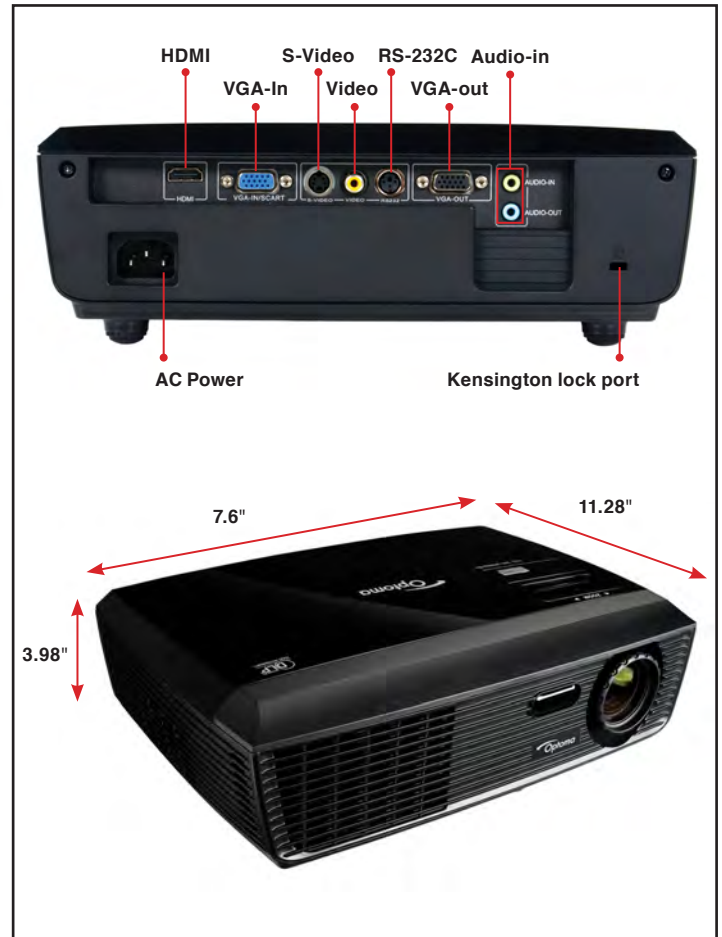

Warranty

1-Year Limited Parts and Labor, 90-Days on Lamp

In the Box (Standard Accessories)

AC power cord, VGA to VGA cable, remote control, batteries for remote, multilingual CD-ROM user's manual, quick start card, and warranty card

Optional Accessories

Ceiling mount, S-video cable, Optoma screens and DLP® Link™ 3D glasses

Accessory Part Numbers

Lamp: BL-FP190B Mount: BM-5001U
Remote: BR-5048N DLP® Link™ 3D glasses: ZD301

UPC 796435 41 876 2

www.OptomaUSA.com

Optoma
Projector Expert

Copyright © 2013 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time.