

Maximize Your Image



The Optoma EX525ST is a comprehensive short throw digital projector. It features a multitude of connectivity options, XGA resolution and an amazing short throw distance - a 100-inch image at a 4-foot throw. Fitting in a variety of environments, from classroom to conference room, and featuring BrilliantColor™ technology and a DLP® chipset from Texas Instruments, the EX525ST ensures superb image clarity.

EX525ST FEATURES


- ❑ Native XGA resolution, HD compatible
- ❑ Short throw lens with throw ratio of 0.6:1
- ❑ Features Texas Instruments DLP chipset and BrilliantColor technology
- ❑ Extensive connectivity such as DVI, VGA, s-video, composite video, RS-232, USB and RJ45
- ❑ Manage projector via network connection
- ❑ Filter free design means the low cost of ownership

EX525ST | Multimedia Projector

Projection Distance/Image Size

Projection Distance (Feet)	Diagonal (Inches)	Width (Inches)	Height (Inches)
1.6	41.0	32.0	24.0
3.3	82.0	66.0	49.5
4.9	123.0	98.0	73.5
6.6	164.0	132.0	99.0
8.2	205.1	164.0	123.0
9.8	246.1	196.0	147.0
12.1	303.5	242.0	181.0

Control Panel

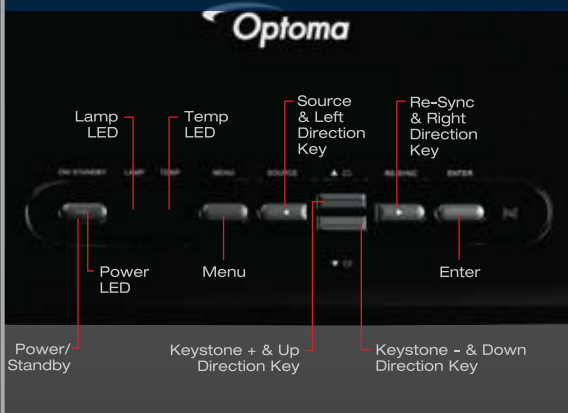

Optional Accessories

Lamp:	BL-FP200G
Remote:	BR-5026N
VGA to VGA Cable (2m):	BC-VGVGXX02
AC Power Cord (1m):	BC-PUPIXY01
RS232 Male to Mini-Din Male (2m):	BC-RDRMYX02
S-Video Cable (2m):	BC-SVSVXX02
Composite Cable (1.8m):	BC-COCOXX02
VGA to Component Cable (2m):	BC-VGCRXX02
DVI to DVI Cable (2m):	BC-DIDIXX02
DVI to HDMI Adapter:	BC-DIHMXY00
Mini-Jack to RCA Audio Adapter:	BC-MJADXY00
100" 4:3 Manual Pull-Down Screen:	DS-3100PM
Carrying Case:	BK-4024
Ceiling Mount:	BM-2018U
Extension Mount:	BM-2020U

Specifications

Display Technology:	Single 0.55" DMD DLP® Technology by Texas Instruments
Resolution:	Native XGA (1024 x 768)
Maximum Resolution:	UXGA (1600 x 1200)
Brightness (Typical):	2500 ANSI Lumens
Contrast Ratio:	2500:1 (Full On/Full Off)
Lamp Type:	200W P-VIP
Lamp Life (STD/Bright):	Estimated at 4000/3000 Hours
Throw Ratio:	0.6:1 (Distance/Width)
Image Size (Diagonal):	41" to 303" (1.04 to 7.69m)
Projection Distance:	1.64' to 12.14' (0.49 to 3.70m)
Noise Level (STD/Bright):	28dB/30dB
Remote Control:	Remote Control w/Mouse
Monitor Loop Through:	D-Sub 15 VGA Output (Functional in Both Normal and Standby Modes)
Computer Compatibility:	UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i)
Aspect Ratio:	4:3 Native, 16:9 Compatible
Projection Lens:	F = 2.59, f = 6.97mm, Manual Focus, 2x Digital Zoom
User Controls:	Complete On Screen Menu Adjustments in 17 Languages
Audio:	One 8-Watt Speaker
Keystone Correction:	±40° Vertical
Vertical Refresh Rate:	50 to 85 Hz
Horizontal Scan Rate:	91 kHz
Power Supply:	AC Input 100-240V, Auto-Switching
Power Consumption:	280 Watts (Maximum), <5 Watts (Standby)
Weight:	9.5 lbs (4.3 kg)
Dimensions (W x H x D):	13.3" x 5.3" x 10.9" (339 x 135 x 276 mm)
Operating Temperature:	41-95° F (5-35° C) (85% Humidity), Adjustable Fan Speed for High Altitude Application
Displayable Colors:	134.2 Million
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	80%
Security:	Kensington® Lock Port, Security Bar w/Password Protection
I/O Connectors:	DVI-I w/HDCP, VGA-In, VGA-Out, S-Video, Composite Video, RJ45, RCA Audio-In, Mini-Jack Audio-In, Mini-Jack Audio-Out, USB, RS-232
Standard Accessories:	AC Power Cord, VGA to VGA Cable, USB Cable, Remote Control, Batteries for Remote, Lens Cap, Quick Start Guide, Warranty Card and CD-ROM User's Manual
Optional Accessories:	Ceiling Mount, VGA to Component Cable, S-Video Cable, Composite Video Cable, DVI to DVI Cable, DVI to HDMI Cable, DVI to VGA Adapter, RS-232 Cable, Soft Carrying Case and Panoview™ Series Screens
Warranty:	3 Years Optoma Express Replacement Service, 1 Year on Lamp
UPC:	796435 11 253 0

www.OptomaUSA.com



All Specifications are subject to change without notice. ©2009 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments. All other names mentioned herein are property of their respective owners.

Date: EX525ST-001-123008