


Brilliant Images, Long-Term Reliability

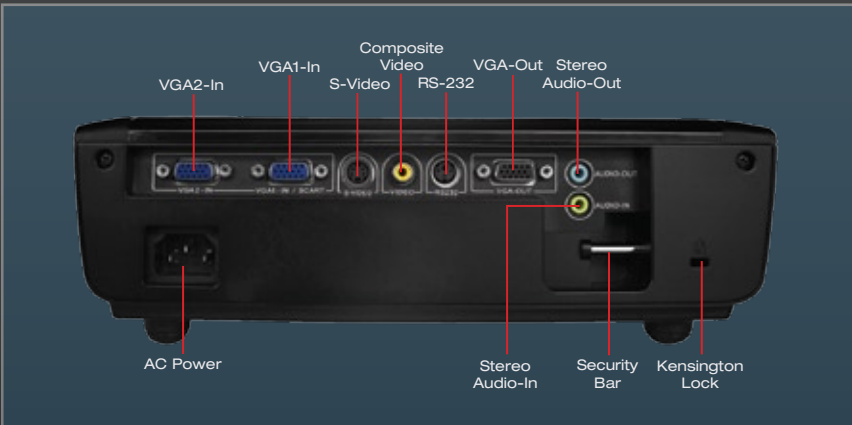

TX536 FEATURES

- ❑ Native XGA resolution
- ❑ Rich color display - Texas Instruments DLP® with BrilliantColor™ Technology
- ❑ Wide range of connectivity options: two VGA-in, VGA-out, s-video, composite video, audio-in, audio-out and RS-232
- ❑ Protect your investment – control panel lock, security bar and password protection
- ❑ Eco-friendly power consumption – sub-one watt standby mode
- ❑ Rapid power-on and shutdown – no waiting
- ❑ 3 years express replacement service and one year lamp warranty

Designed for the demanding requirements of schools and businesses, the Optoma TX536 offers 2800 ANSI lumens and 3000:1 contrast ratio to project large, crisp and brilliant high contrast images to keep audiences engaged. Features such as filter-free design, a dependable long-life DLP chip, extended lamp life guarantee, and low standby power consumption contribute to save you money in the long run.

TX536 | Multimedia Projector

Projection Distance/Image Size

Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)
6	42	38
8	56	51
10	71	64
12	85	77
14	99	90
16	113	102
18	127	115

Control Panel



Optional Accessories

Lamp:	BL-FU185A
Remote:	BR-3043N
VGA Cable (1.8m):	BC-VGVGXX02
Power Cord (1m):	BC-PUPIX01
Power Cord (11m):	BC-PUPIX01
Composite Cable (1.8m):	BC-COCOXX02
VGA to Component Adaptor:	BC-VGCRXY00
Wireless Dongle:	BI-EXTGB
Ceiling Mount:	BM-5001U
Carrying Case:	BK-4006
100" Matte White 4:3 Manual Pull-Down Screen:	DS-3100PMG+

Specifications

Display Technology:	Single 0.55" DMD DLP® Technology by Texas Instruments
Resolution:	Native XGA (1024 x 768)
Maximum Resolution:	UXGA (1600 x 1200)
Brightness (Typical):	2800 ANSI Lumens
Contrast Ratio:	3000:1 (Full On/Full Off)
Lamp Type:	185W UHP
Lamp Life (STD/Bright)*:	Estimated at 4000/3000 Hours
Throw Ratio:	1.95 to 2.15:1 (Distance/Width)
Image Size (Diagonal):	22.9" to 300" (0.58 to 7.62 m)
Projection Distance:	3.28' to 32.8' (1.0 to 10 m)
Noise Level (STD/Bright):	28dB/30dB
Remote Control:	IR Remote Control
Computer Compatibility:	UXGA, WXGA, SXGA+, SVGA, XGA, SVGA, VGA Resized, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
Aspect Ratio:	4:3 Native, 16:9 & 16:10 Compatible
Projection Lens:	F=2.41-2.55, f=21.8-23.98 mm, 1.1x Manual Zoom and Focus
Offset:	115%
Monitor Loop Through:	D-Sub 15-Pin VGA Output (Functional in Both Normal and Standby Modes)
User Controls:	Complete On-Screen Menu in 23 Languages
Audio:	2-Watt Speaker
Keystone Correction:	± 40° Vertical
Vertical Refresh Rate:	24 to 85 Hz
Horizontal Scan Rate:	15.3 to 91.1 KHz
Power Supply:	AC Input 100-240V, 50-60Hz, Auto-Switching
Power Consumption:	255 Watts (Bright), 230 Watts (STD), <1 Watt (Standby)
Weight:	5 lbs (2.27 kg)
Dimensions (W x H x D):	11.28" x 3.98" x 7.6" (287 x 101 x 193 mm)
Operating Temperature:	41° to 95°F (5° to 40°C), 85% Max Humidity, Adjustable Fan Speed for High Altitude Application
Displayable Colors:	1.07 Billion
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	85%
Security:	Kensington® Lock, Keypad Lock, Security Bar
I/O Connectors:	Two VGA-In, VGA-Out, S-Video, Composite Video, Stereo Audio-In, Stereo Audio-Out and RS-232
Standard Accessories:	AC Power Cord, VGA to VGA Cable, Remote Control, Batteries for Remote, Carrying Case, Lens Cap, Quick Start Card, CD-ROM User's Manual and Warranty Card
Optional Accessories:	Ceiling Mount, VGA Cable, S-Video Cable, Composite Video Cable, RS-232 Cable and Panoview Series Screens
Warranty:	Three Years Optoma Express Replacement Service, One Year on Lamp
UPC:	796435 41 139 8

www.optoma.com

*Lamp life is dependent upon many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.



All Specifications are subject to change without notice. ©2010 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments. All other names mentioned herein are property of their respective owners.