


Bright, Feature Rich and Portable

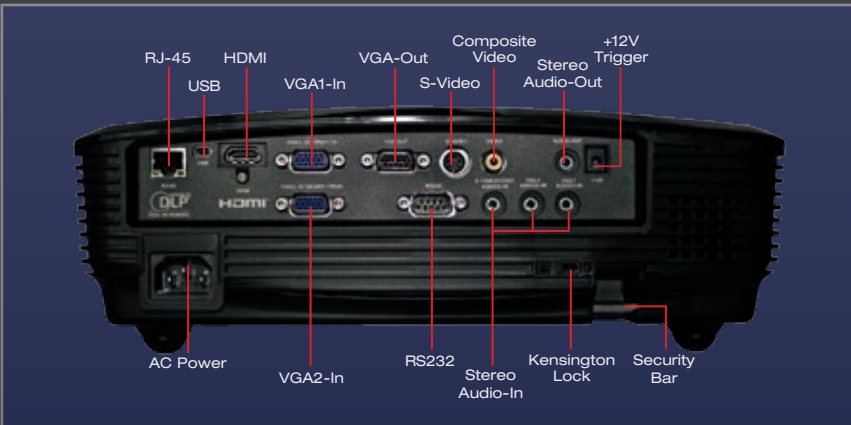

Robustly featured and powerfully portable, the 3D Ready Optoma TX762 is designed for maximum versatility and low-cost operation. With 4000 ANSI lumens and an 8-watt speaker, the TX762 delivers exceptional brightness and rich audio wherever the presentation – in large conference rooms, meeting rooms, training facilities or classrooms. With extensive connectivity options, including RJ45 for remote management and control, the TX762 is ready for the most demanding applications.

*3D source, 3D content and 3D glasses are required for 3D viewing

TX762 FEATURES


- ❑ Easy-to-read text – bright at 4000 ANSI lumens; high contrast ratio of 3000:1
- ❑ Enter the 3rd dimension to deliver outstanding education, training and gaming images
- ❑ Standby VGA and audio pass-thru feature reduces power consumption
- ❑ Built-in 8-watt speaker
- ❑ Remote control and management via RS-232 or RJ45
- ❑ Broad range of audio and video connectivity

TX762 | Multimedia Projector

Projection Distance/Image Size

Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)
6	56	47
8	75	63
10	94	78
12	113	94
14	131	109
16	150	125
18	169	141

Control Panel

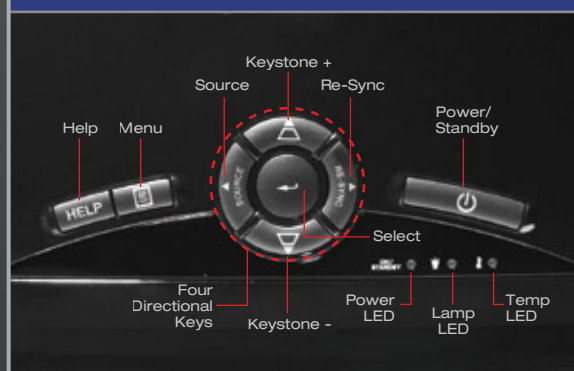

Optional Accessories

Lamp:	BL-FP280B
Remote Control:	BR-5030L
Carrying Case:	BK-4028
Wireless Dongle:	BI-EXTGB
Power Cord (1m):	BC-PUPIX01
Power Cord (11m):	BC-PUPIX11
HDMI Cable (7.5m):	BC-HMHMX08
Composite Cable (1.8m):	BC-COC0XX02
VGA Cable (1.8m):	BC-VGVGXX02
VGA Cable (5m):	BC-VGVGXX05
VGA to Component Adapter:	BC-VGCRXY00
Ceiling Mount:	BM-5001U
100" Matte White 4:3 Manual Pull Down Screen:	DS-3100PMG+

Specifications

Display Technology:	Single 0.55" DMD DLP® Technology by Texas Instruments
Resolution:	Native (1024 x 768)
Maximum Resolution:	UXGA (1600 x 1200)
Brightness (Typical):	4000 ANSI Lumens
Contrast Ratio:	3000:1 (Full On/Full Off)
Lamp Type:	280W P-VIP
Lamp Life (STD/Bright):	Estimated at 3000/2000 Hours
Throw Ratio:	1.6 to 1.92:1 (Distance/Width)
Image Size (Diagonal):	30" to 307" (0.92 to 9.21 m)
Projection Distance:	3.93' to 32.8' (1.2 to 10 m)
Noise Level (STD/Bright):	29dB/31dB
Remote Control:	Fully Featured Remote with Laser Pointer and Mouse Functions
Computer Compatibility:	UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
Aspect Ratio:	4:3 Native, 16:9 & 16:10 Compatible
Projection Lens:	F=2.4~2.66, f=18.2~21.8 mm, 1.2x Zoom & Focus
Offset:	115%
Loop Through:	Monitor: D-Sub 15-Pin VGA Output Audio: Stereo Mini-Jack Output (Functional in Both Normal and Standby Modes)
User Controls:	Complete On-Screen Menu Adjustments in 23 Languages
Audio:	8-Watt Stereo Speaker
Keystone Correction:	± 40° Vertical
Vertical Refresh Rate:	24 to 120 Hz
Horizontal Scan Rate:	15.3 to 91.1 KHz
Power Supply:	AC Input 100-240V, 50-60 Hz, Auto-Switching
Power Consumption:	372 Watts Max (Bright), 314 Watts (STD) <1 Watt (Standby)
Weight:	6.4 lbs (2.9 kg)
Dimensions (W x H x D):	12.76" x 3.82" x 9.21" (324 x 97 x 234 mm)
Operating Temperature:	41° to 104°F (5° to 40°C), 80% Max Humidity, Adjustable Fan Speed for High Altitude Application
Displayable Colors:	1.07 Billion
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	85%
Security:	Kensington® Lock, Keypad Lock and Security Bar
I/O Connectors:	HDMI, Two VGA-In, VGA-Out, S-Video, Composite Video, Three Stereo Audio-In, Stereo Audio-Out, +12V Trigger, USB, RS-232 and RJ45
Standard Accessories:	AC Power Cord, VGA to VGA Cable, Remote Control, Batteries for Remote, USB Cable, Carrying Case, Lens Cap, Multilingual CD-ROM User's Manual, Quick Start Card and Warranty Card
Optional Accessories:	Wireless Dongle, Ceiling Mount, HDMI Cable, VGA to Component Cable, S-Video Cable, Composite Video Cable, RS-232 Cable and Panoview™ Series Screens
Warranty:	Up to Three Years Limited Parts and Labor, Up to One Year on Lamp
UPC:	796435 41 132 9

www.optoma.ca

HDMI
HIGH DEFINITION MULTIMEDIA INTERFACE

RoHS
COMPLIANT

3D
READY

HIGH DEFINITION TELEVISION
HDTV
MONITOR

NO FILTER
REQUIRED

BrilliantColor
EXTRA BRIGHT
4500 ANSI LUMENS
1080P

PICTURE BY
DLP
TEXAS INSTRUMENTS

All Specifications are subject to change without notice. ©2010 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments. All other names mentioned herein are property of their respective owners.