


Versatile, Wide & Sharp

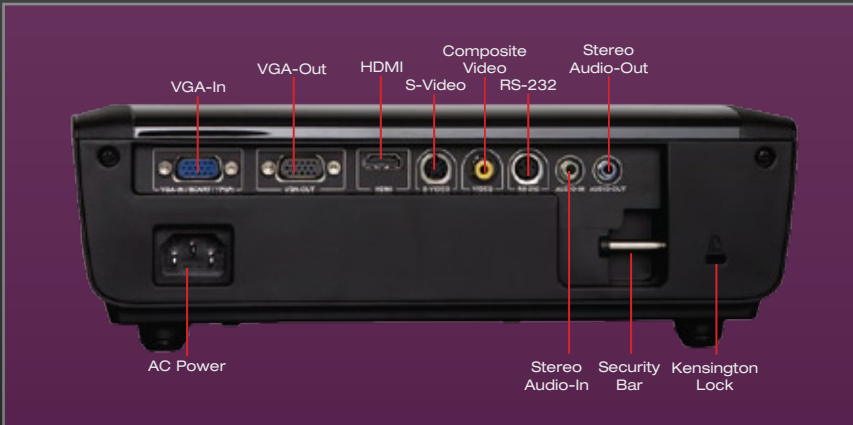

Small, sleek and stylish, the Optoma PRO350W provides a combination of performance and affordability. Features such as widescreen display, 2800 ANSI lumens, contrast ratio of 3000:1, lamp life of up to 4000 hours, filter-free design and low standby power consumption ensure that the Optoma PRO350W will not only save money in the long run, but also present a perfect, colorful, crisp image whether projecting a presentation or movie.

3D content can be viewed with DLP®Link™ 3D glasses when the projector is connected to a computer with a compatible 3D graphics card. Please visit www.optoma.com for more information.

PRO350W FEATURES

- ❑ Native WXGA DLP® by Texas Instruments with BrilliantColor™ Technology
- ❑ Bright images and high contrast ratio – 2800 ANSI lumens and 3000:1 contrast ratio (full on/full off)
- ❑ Rapid power-on and shutdown – saving you time and money
- ❑ Portable at 5 lbs – convenient carrying case included

PRO350W | Multimedia Projector

Projection Distance/Image Size

Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)
6	55	50
8	73	67
10	91	83
12	110	100
14	128	117
16	146	133
18	164	150

Control Panel



Optional Accessories

Lamp:	BL-FU185A
Remote Control:	BR-3047N
Carrying Case:	BK-4006
Power Cord (1m):	BC-PUPIXY01
Power Cord (11m):	BC-PUPIXY11
HDMI Cable (5m):	BC-HMHMX05
Composite Cable (1.8m):	BC-COCOX02
VGA Cable (1.8m):	BC-VGVGX02
VGA Cable (5m):	BC-VGVGX05
VGA to Component Adapter:	BC-VGCRXY00
Ceiling Mount:	BM-5001U
92" Matte White 16:9 Manual Pull-Down Screen:	DS-9092PMG+

Specifications

Display Technology:	Single 0.65" DMD DLP® Technology by Texas Instruments
Resolution:	Native WXGA (1280 x 800)
Maximum Resolution:	UXGA (1600 x 1200)
Brightness (Typical):	2800 ANSI Lumens
Contrast Ratio:	3000:1 (Full On/Full Off)
Lamp Type:	185W P-VIP
Lamp Life (STD/Bright):	Estimated at 4000/3000 Hours
Throw Ratio:	1.55 to 1.7:1 (Distance/Width)
Image Size (Diagonal):	27.2" to 300" (0.58 to 7.62 m)
Projection Distance:	3.28' to 32.8' (1.0 to 10 m)
Noise Level (STD/Bright):	30dB/32dB
Remote Control:	IR Remote Control
Computer Compatibility:	UXGA, WXGA, SXGA+, SVGA, XGA, SVGA, VGA Resized, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
3D Compatibility:	120Hz frame sequential 3D for resolutions up to 720p, 60Hz field sequential 3D for resolutions up to 480i
Aspect Ratio:	16:10 Native, 16:9 and 4:3 Compatible
Projection Lens:	F=2.41-2.55, f=21.8-23.98 mm, 1.1x Manual Zoom and Focus
Offset:	115%
Monitor Loop Through:	D-Sub 15-Pin VGA Output (Functional in Both Normal and Standby Modes)
User Controls:	Complete On-Screen Menu in 23 Languages
Audio:	2-Watt Speaker
Keystone Correction:	± 40° Vertical
Vertical Refresh Rate:	24 to 120 Hz
Horizontal Scan Rate:	15.3 to 91.1 KHz
Power Supply:	AC Input 100-240V, 50-60Hz, Auto-Switching
Power Consumption:	255 Watts (Bright), 207 Watts (STD), <1 Watts (Standby)
Weight:	5 lbs (2.27 kg)
Dimensions (W x H x D):	11.28" x 3.98" x 7.6" (287 x 101 x 193 mm)
Operating Temperature:	41° to 104°F (5° to 40°C), 85% Max Humidity, Adjustable Fan Speed for High Altitude Application
Displayable Colors:	1.07 Billion
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	85%
Security:	Kensington® Lock, Keypad Lock, Security Bar
I/O Connectors:	HDMI, VGA-In, VGA-Out, S-Video, Composite Video, Stereo Audio-In, Stereo Audio-Out and RS-232
Standard Accessories:	AC Power Cord, VGA to VGA Cable, Remote Control, Batteries for Remote, Carrying Case, Lens Cap, Multilingual CD-ROM User's Manual, Quick Start Card and Warranty Card
Optional Accessories:	HDMI Cable, Ceiling Mount, VGA to Component Cable, S-Video Cable, Composite Video Cable, RS-232 Cable and Panoview Series Screens
Warranty:	One Year Limited Parts and Labor, 90 Days on Lamp
	796435 41 157 2

www.optoma.com



All Specifications are subject to change without notice. ©2010 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments. All other names mentioned herein are property of their respective owners.